



New-Aire Fireplace Systems Specifications Sheet


REGULAR AND CORNER UNIT MEASUREMENTS

Model 42		Model 44		Model 48	
A Firebox Opening	33"	A Firebox Opening	38"	A Firebox Opening	42"
B Width of Unit	38"	B Width of Unit	42 1/2"	B Width of Unit	46 1/2"
C Width of Unit with Motor	70"	C Width of Unit with Motor	75"	C Width of Unit with Motor	80"
D Height of Unit	48"	D Height of Unit	48"	D Height of Unit	48"
E Width of Concrete Base	86"	E Width of Concrete Base	91"	E Width of Concrete Base	92"
F Unit Weight	525 Lbs.	F Unit Weight	625 Lbs.	F Unit Weight	725 Lbs.
G Unit Weight with Doors	633 Lbs.	G Unit Weight with Doors	733 Lbs.	G Unit Weight with Doors	833 Lbs.
H Depth of Unit	26"	H Depth of Unit	26"	H Depth of Unit	26"

Note: Concrete pad dimensions given above are based on 4" brick installation. If any wider material is used, extend your concrete pad accordingly. Depth of pad is determined by mass of chimney and local building codes.

SEE-THROUGH MEASUREMENTS

Model 42		Model 44	
A Firebox Opening	33"	A Firebox Opening	38"
B Width of Unit	38"	B Width of Unit	42 1/2"
C Width of Unit with Motor	70"	C Width of Unit with Motor	75"
D Height of Unit	48"	D Height of Unit	48"
E Width of Concrete Base	86"	E Width of Concrete Base	91"
F Unit Weight	580 Lbs.	F Unit Weight	680 Lbs.
G Unit Weight with Doors	826 Lbs.	G Unit Weight with Doors	926 Lbs.
H Depth of Unit	30"	H Depth of Unit	30"

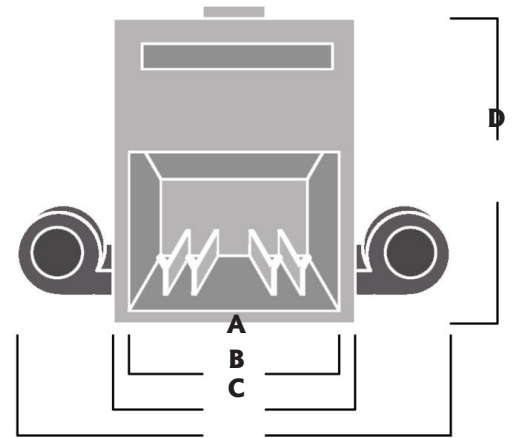

See-Through Construction allows viewing from two rooms or allows loading from outside or garage with security doors

NEW-AIRE STANDARD FEATURES:

- (2) 480 CFM Two-Speed Blowers
- 4 x 30 Adjustable Discharge Grill and Frame
- 10 x 14 Return Air Grills and Frames
- Two Speed Switch with Wall Plate
- Temperature Controlled Blower Switch
- Motor Boots
- Built-In Log Grates
- Ash Dump
- Ash Dump Clean-Out Door
- Wall Thermostat
- High-temp Wiring
- Duct Outlet Rings

OPTIONAL CONSTRUCTION COMPONENTS:

- Heavy Construction
- Variable Speed Switch
- Approved for use with double wall Class "A" steel flue systems
- BBQ Grill
- Bean Pot Holder
- Air-Lator and Outside Air Hood (outside combustion air damper to increase efficiency)
- Rotary-Control Damper
- Angle Iron Kit
- Gas Log Lighter and Valve